

EK-xx52/JK-xx52/TK-xx52/MK3100 JUMPER SETTING

- **JP1 : COM3 PORT DC SUPPLY SELECT**

Pin 1-2 Short : COM3 Pin1 connected as 12V DC

Pin 2-3 Short : COM3 Pin1 connected as DCD

- **JP3 : COM1/COM2 PORT DC SUPPLY SELECT**

Pin 1-3 Short : COM1 Pin1 connected as 12V DC

Pin 3-5 Short : COM1 Pin1 connected as DCD

Pin 2-4 Short : COM2 Pin1 connected as 12V DC

Pin 4-6 Short : COM2 Pin1 connected as DCD

- **SW1 : Clear CMOS Setting**

DIP	Switch select	
1	OFF	Normal Operation
	ON	Clear CMOS
2	OFF	Enable security measures defined in the Flash Descriptor
	ON	Disable Flash Descriptor Security (override)

- **COM1~COM3 : +5V through BIOS ; VGA +12V through BIOS**


Press ESC to access Advanced/OEM IO Configuration

VGA DSUB 12V : Enabled

COM1 DB9 5V : Disabled

COM2 DB9 5V : Disabled

COM3 DB9 5V : Disabled

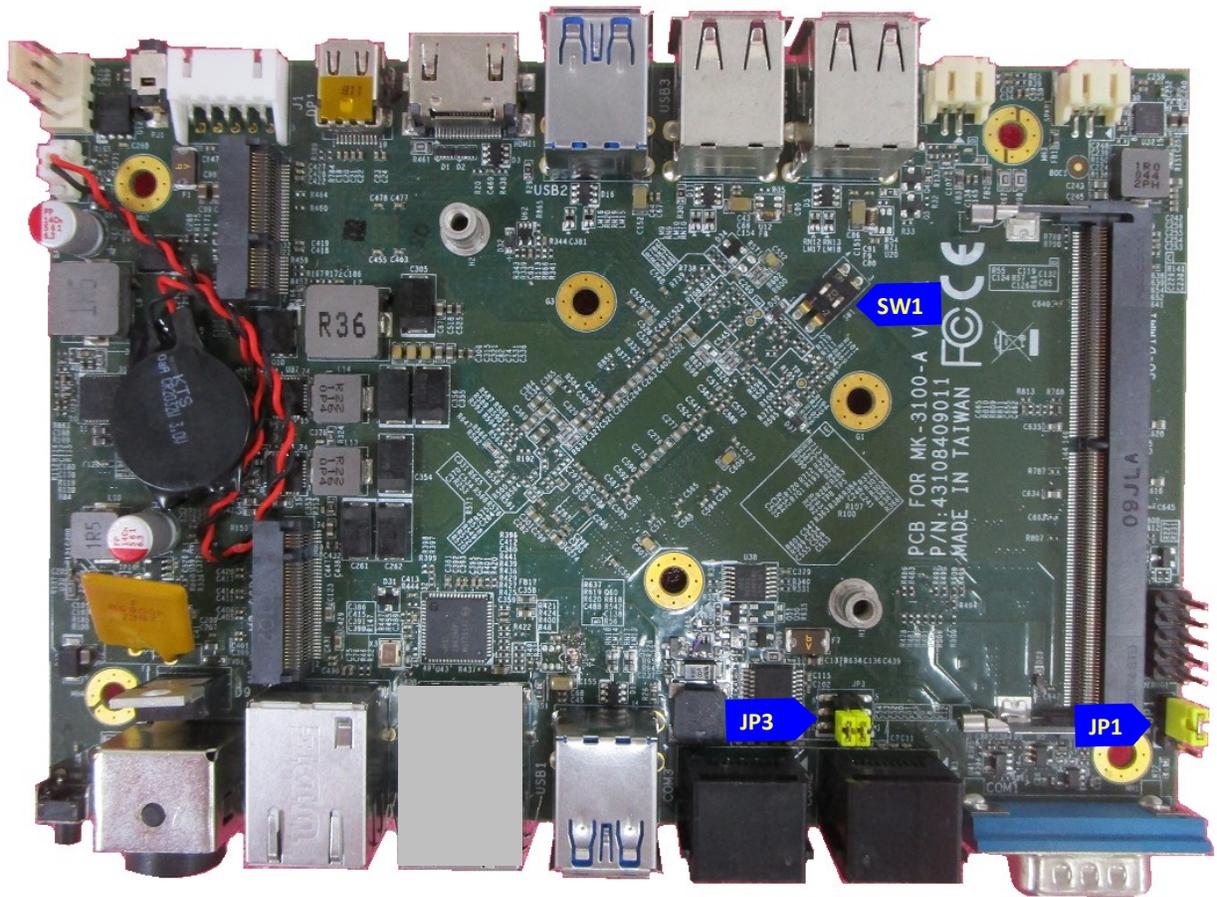

SW1

JP3

JP1

PCB FOR MK-3100-A V
P/N: 4310840011
MADE IN TAIWAN



R36

09JLA